



ES32DP

Pass-Through Recirculating Warewasher



The Eswood ES32DP warewasher is Australian made, designed and built to last in harsh conditions. Its compact form excels in commercial kitchens, offering continuous performance. Independent upper and lower spray arms ensure thorough cleaning, while digital temperature displays ease monitoring. Standard drain pump, detergent and rinse aid pumps streamline the process. The ES32DP is a reliable and efficient solution for safe food handling and maintaining a hygienic workspace.

ES32DP standard features and benefits

- Counter-balanced lift-up hood with ergonomically designed wrap around handle
- Durable stainless-steel body construction and wash arms
- Automatic fill to wash and rinse tanks
- High capacity 540-700 pieces
- Digital wash and rinse temperature controllers and displays
- Detergent and rinse aid pump as standard
- Suitable for corner or inline installation
- Machine starts upon closure of hood
- Easily removable spray arms and filters
- Wash and Rinse pump fitted as standard
- Drain pump fitted as standard
- Operation interlocked to rinse temperature

Standard accessories

- 2 x plate rack
- 1 x cup rack
- 1 x cutlery container



90 sec



120 sec



Please note, due to ongoing product development and improvement, we reserve the right to change product design and specification at any time without notice.



1800 013 123 | +61 2 9604 7333
sales@middleby.com.au
middleby.com.au

VIC - TAS - 47 Stubbs Street, Kensington VIC 3031
QLD - U12, 210 Queensport Rd Nth, Murarrie QLD 4172
WA - U2, 9 Meares Way, Canning Vale WA 6155


HEAD OFFICE
AND MANUFACTURING PLANT
211-217 Woodpark Road, Smithfield NSW 2164

v2_2024



ES32DP Pass-Through Recirculating Warewasher

- A. Drain connection Ø22mm x 1.8m drain hose
- B. Hot water supply inlet 1/2" BSPF (15-58 psi / 100-400 kPa) 65°C
- C. Electrical connection 415V/50Hz/3Ph+N+E

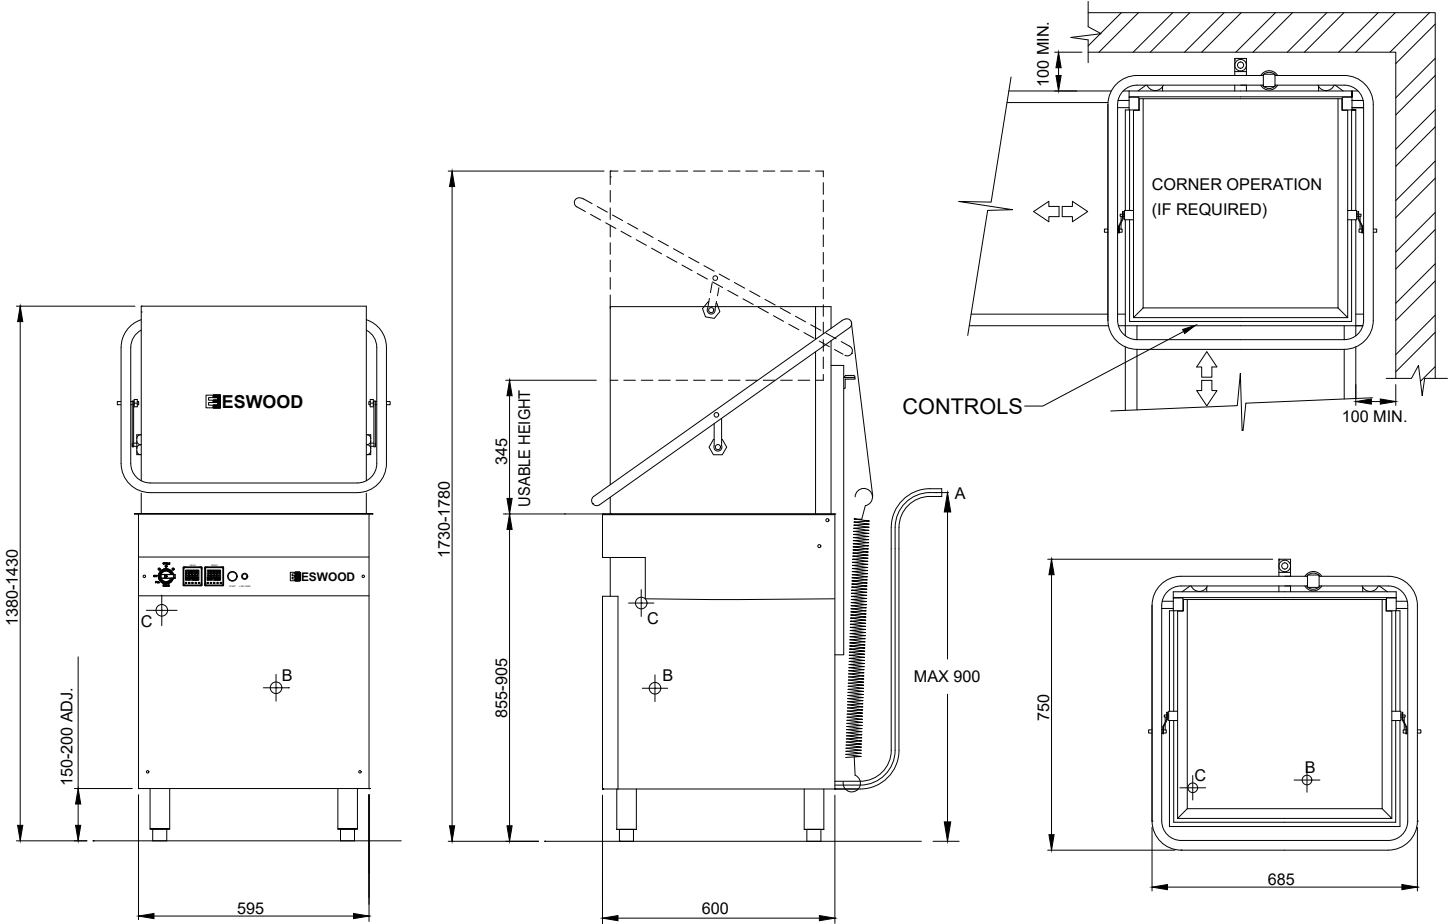

ES32DP SPECIFICATIONS



DIMENSIONS (WxDxH)	595 x 600 x 1405 mm
HEIGHT WITH DOOR OPEN	1755 mm
RACK SIZE (WxD)	500 x 500 mm
ELECTRICAL CONNECTION	3 Phase - 415V + N + E
RATING	9.5 kW / 13.2 Amps
WATER CONNECTION	65°C / 1-4 bar (15-58 psi)
DRAIN CONNECTION	Ø22mm
MEAL SERVICE	60 - 130 pax (32 racks/hr)

WASH CYCLE	90 sec, 120 sec
WASH AND RINSE PUMP	Fitted
DETERGENT AND RINSE AID PUMP	Fitted
DRAIN PUMP	Fitted
WATER CONSUMPTION	3.5L/cycle
TANK CAPACITY	30L
WEIGHT	103 kg
PACKED	0.5 m ³

Please note, due to ongoing product development and improvement, we reserve the right to change product design and specification at any time without notice.



1800 013 123 | +61 2 9604 7333
 sales@middleby.com.au
 middleby.com.au

VIC - TAS - 47 Stubbs Street, Kensington VIC 3031
QLD - U12, 210 Queensport Rd Nth, Murarrie QLD 4172
WA - U2, 9 Meares Way, Canning Vale WA 6155

HEAD OFFICE AND MANUFACTURING PLANT
 211-217 Woodpark Road, Smithfield NSW 2164

v2_2024