



Client _____ Quantity _____
Project _____ Position _____

Roll-in

Model: J160/2M

Cod: J11160200201

Technical data

Gross capacity:	1679 lt
Temperature range:	-2°+8°C
Refrigerant unit:	Plug-In
Climate class:	5
Cooling gas:	R290
Defrost:	Hot gas
Valve:	Supplied standard with solenoid
Dimensions:	1620×815×2115 mm
Packing dimensions:	1640×850×2250 mm
Gross weight:	220 Kg
Voltage:	220-240 V - 50 Hz
Total rate:	390 W
Absorbed Current:	1,8 A
Cooling capacity:	713 W*
*:	Evap. -10°C Cond. +55°C

Features

Standard equipment:	LED lighting, lock with key
Control:	Electronic, display flush with the panel
Doors:	1 door, self-closing with a 105° stop, right hinged
Door gasket:	Magnetic, triple chamber and easily replaceable
Insulation:	75 mm thickness - CFC/HCFC free
Exterior/interior finishing:	One-piece structure in AISI 304 stainless steel. Back in galvanized steel
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Handle:	Snap-in chrome with integrated lock
Cosmo:	Ready for connection to Cosmo Hub

Accessories and variants

Power supply frequency 60Hz

Other special voltage

Trolley GN2/1 20 trays 598x660x1630 mm


Cosmo connection kit

COSMO - wi-fi control

Cosmo is the wi-fi technology that allow to connect and monitor all Coldline appliances. Connect Roll-in cabinets to a Cosmo hub (MODI, VISION or LEVTRONIC) and from the app you can check the operating conditions of each machine and receive alerts in case of abnormal functioning.

*The installation requires a kit for the replacement of the racks

Technical draw

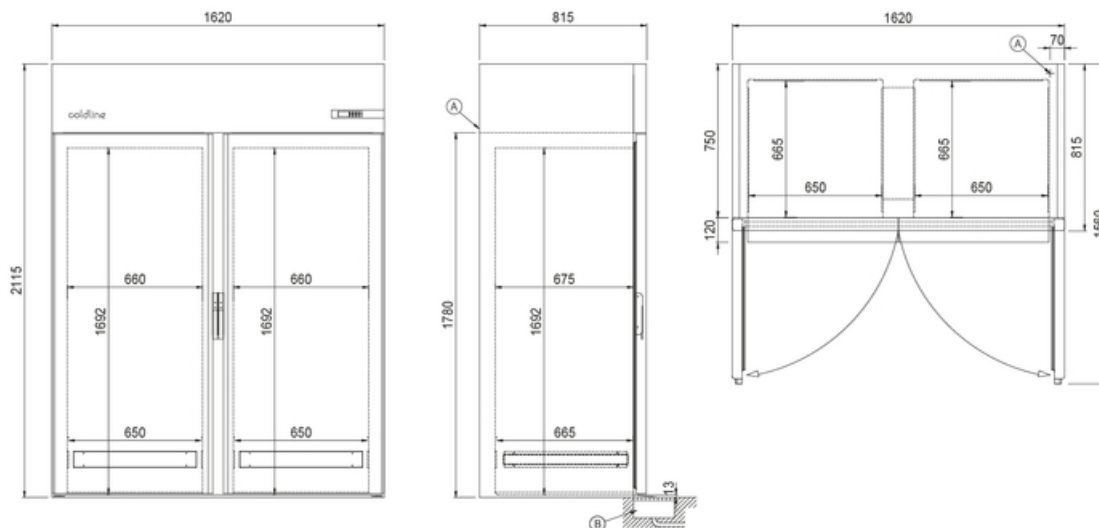

A: Power supply cable outlet

B: Condensation water drain