


UNDERCOUNTER FRIDGES WITH DRAWERS

XUB7C22S4D



The Fed-X XUB D Series undercounter fridges offer exceptional practicality for commercial kitchens. Their refrigerated drawers keep ingredients within reach to improve workflow, while robust stainless steel construction and precise fan-forced cooling ensure reliable performance in Australian conditions.

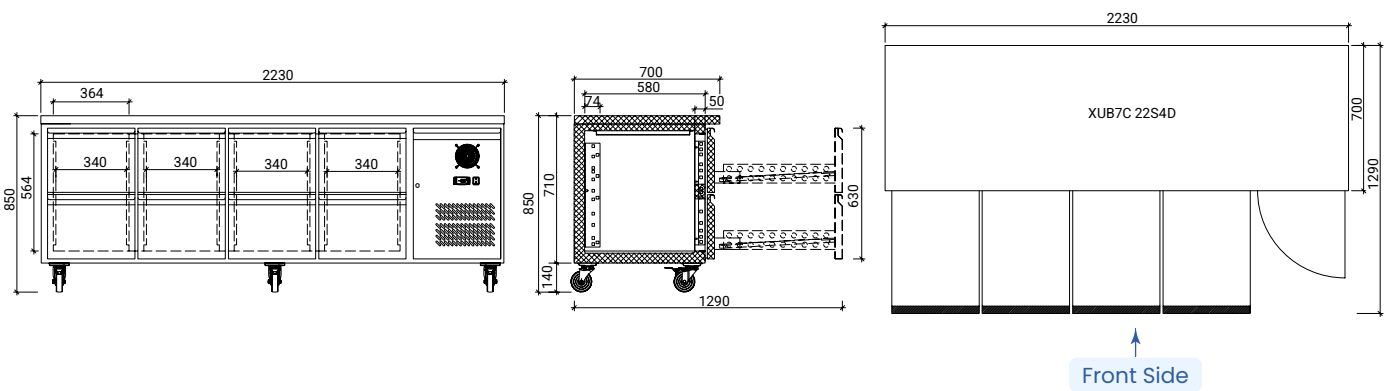

FEATURES AND FUNCTIONS	
Cooling System	Fan forced cooling
Defrost Method	Auto-defrost
Energy Consumption	4.767 kWh/24h
Exterior & Interior of the Cabinet	Exterior Body & Interior Body AISI201
Ergonomic Design	Water tray 0.7L, Digital controller, Rounded corners for easy cleaning, Unit can be placed against wall, Heavy duty castors with front wheel brakes.
Drawers	8 Drawers, AISI201, Heavy duty drawers, Integrated recessed drawer handle.
Blowing Agent	60mm, Cyclopentane
Ventilation (mm)	Top/Sides: 50mm, Rear: No requirement

TECHNICAL DESCRIPTION	
Power Cord	10Amp plug and lead
Power Cord Length	3m (2.3m outside cabinet)
Power Supply	240V/50Hz, 345W
Rated Current	2A
Evaporator Design	Aluminum finned type 1 pc fan
Compressor Cooling Capacity(W)	295

PHYSICAL QUALITIES	
Width (mm)	2230
Depth (mm)	700
Height (mm)	850
Packing Width (mm)	2260
Packing Depth (mm)	730
Packing Height (mm)	910
Net Weight (kg)	150
Net Capacity (L)	415
Gross Capacity (L)	553

PHYSICAL QUALITIES	
Max. ambient temp/RH	43°C 70%
Climate Class	5
Temperature Range	-2°C to +8°C
Rated kWh/year	1166
Refrigerant	R290 (63g)
Energy Efficiency Index (EEI %)	61.04
Star Rating / GEMS Rating	3 (5Ml)

SAFETY & STANDARDS: GEMS Certificate; IEC/IECEE CB Scheme;



WARRANTY

2 Years Parts & Labour Plus 2 Years Parts Only Warranty
When Products Registered Within 14 Days of Invoice



To ensure we continuously offer the best possible products, we reserve the right to modify specifications without any obligation for equipment previously or subsequently sold.